


Products catalog

2023

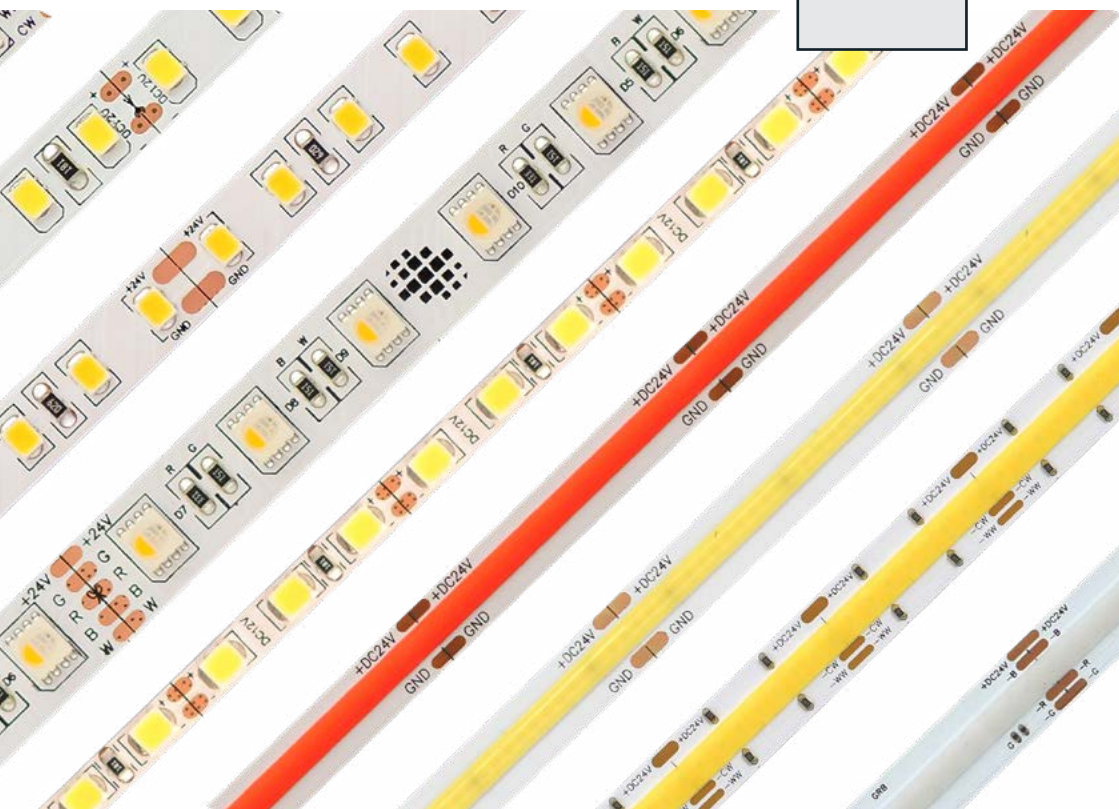

www.fose.eu

ABOUT US

The FOSE brand was created in 2009 year and from begging of its activity main objective was providing high-quality LED lighting. The main product of company are led strips, led neon lights, power supplies and profiles for led strips.

Our led strips have been operating reliably in many places for many years such, as: shopping malls, lighting fixtures, ships, buses, trams and many others. What distinguishes us is the high availability of products and fast shipping. We have large stocks of the most popular products, and we make sure that subsequent batches have the same stable parameters like: power, efficiency, color temperature.



PERSONALIZED LED STRIP

For our customers, we make personalized LED strips, starting from the selection of the base, logo printing, selection of power, color, etc., to packaging in sections of the appropriate length.

We have done projects like:

- LED strip for refrigerated counters to highlight meat products,
- LED strip for lighting the interior of VOLVO buses
- LED strips from our standard offer with personalized LOGO/ packing


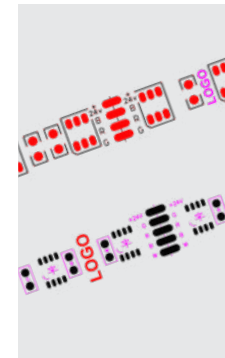


TABLE OF CONTENT

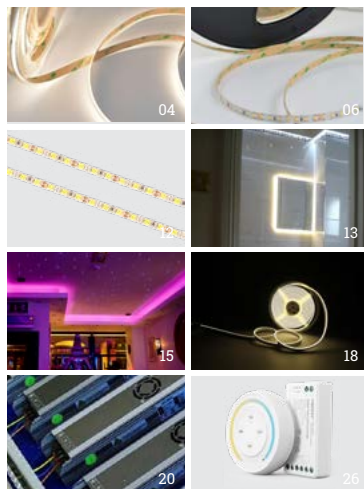

- | | |
|-----|--------------------------|
| 04. | LED Strip COB |
| 06. | LED Strip SMD |
| 12. | LED Strip 4-5mm PCB |
| 13. | LED Strip CCT |
| 15. | Multicolor LED Strip |
| 18. | LED Neon |
| 20. | Power supply |
| 26. | MiBoxer/Milight products |

B2B REGISTER IN

We invite you to register in our B2B system.

You will gain:

- Current stock level
- Information on planned deliveries
- Information on issued invoices
- Quick and easy way to order products
- Individual offer




COB

SERIES

24V DC
Modern LED strip

Available in 320 chip 8W/m or 480 chip 10W per meter. High color rendering Ra>90. Perfect for low profiles where with a milky shade we get a uniform line of light. Used for decoration and lighting in the furniture industry.

COB-320 8W/m

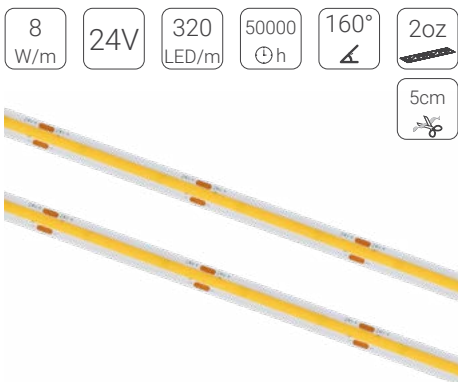


IP20 - 10m/reel


Symbol	EAN13	Tc [K]	CRI	lm / m
COB-320-CW-24	5901289756525	6000	90	800
COB-320-NW-24	5901289756549	4000	90	780
COB-320-WW-24	5901289756556	3000	90	770
COB-320-HW-24	5901289756532	2700	90	740

IP66 - 10m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
COB-320-66-CW-24	5901289756488	6000	90	800
COB-320-66-NW-24	5901289756501	4000	90	780
COB-320-66-WW-24	5901289756518	3000	90	770
COB-320-66-HW-24	5901289756495	2700	90	740



COB-480 10W/m

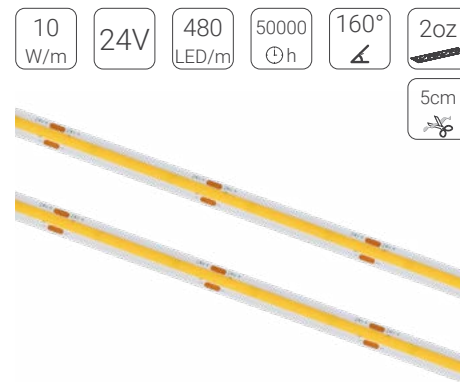

IP20 - 10m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
COB-480-CW-24	5901289756525	6000	90	1000
COB-480-NW-24	5901289756624	4000	90	970
COB-480-WW-24	5901289756631	3000	90	940
COB-480-HW-24	5901289756617	2700	90	900

IP66 - 10m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
COB-480-66-CW-24	5901289756563	6000	90	1000
COB-480-66-NW-24	5901289756587	4000	90	970
COB-480-66-WW-24	5901289756594	3000	90	940
COB-480-66-HW-24	5901289756570	2700	90	900




SPE

SERIES

140 lm/W
24V DC

High efficiency reaching 140lm/W. Low voltage drops. Available in 28, 56, 112, 168 LED versions.

SPE-28



IP20 - 30m/reel


Symbol	EAN13	Tc [K]	CRI	lm / m
SPE-28-CW-24	5901289754316	6000	82	420
SPE-28-NW-24	5901289754323	4000	83	400
SPE-28-WW-24	5901289754330	3000	83	380

IP66 - 10m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SPE-28-66-CW-24	5901289754644	6000	82	420
SPE-28-66-NW-24	5901289754651	4000	83	400
SPE-28-66-WW-24	5901289754668	3000	83	380



SPE-56



IP20 - 30m/reel


Symbol	EAN13	Tc [K]	CRI	lm / m
SPE-56-CW-24	5901289754347	6000	83	820
SPE-56-NW-24	5901289754354	4000	83	800
SPE-56-WW-24	5901289754361	3000	83	780
SPE-56-HW-24	5901289755177	2700	83	740

IP66 - 10m/reel


Symbol	EAN13	Tc [K]	CRI	lm / m
SPE-56-66-CW-24	5901289754675	6000	83	820
SPE-56-66-NW-24	5901289754682	4000	83	800
SPE-56-66-WW-24	5901289754699	3000	83	780

IP68 - 10m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SPE-56-68-CW-24	5901289754439	6000	83	820
SPE-56-68-NW-24	5901289754446	4000	83	800
SPE-56-68-WW-24	5901289754453	3000	83	780



SPE-112



IP20 - 30m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SPE-112-CW-24	5901289754378	6000	83	1600
SPE-112-NW-24	5901289754385	4000	83	1560
SPE-112-WW-24	5901289754392	3000	83	1520
SPE-112-HW-24	5901289755337	2700	83	1450


IP66 - 10m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SPE-112-66-CW-24	5901289754705	6000	83	1600
SPE-112-66-NW-24	5901289754712	4000	83	1560
SPE-112-66-WW-24	5901289754729	3000	83	1520

IP68 - 10m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SPE-112-68-CW-24	5901289754507	6000	83	1600
SPE-112-68-NW-24	5901289754514	4000	83	1560
SPE-112-68-WW-24	5901289754521	3000	83	1520

SPE-168



IP20 - 30m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SPE-168-CW-24	5901289754408	6000	84	2400
SPE-168-NW-24	5901289754415	4000	83	2300
SPE-168-WW-24	5901289754422	3000	83	2200
SPE-168-HW-24	5901289754927	2700	83	2050
SPE-168-822-24	5901289754927	2200	84	1900

IP66 - 10m/reel


Symbol	EAN13	Tc [K]	CRI	lm / m
SPE-168-66-CW-24	5901289754736	6000	84	2400
SPE-168-66-NW-24	5901289754743	4000	83	2300
SPE-168-66-WW-24	5901289754750	3000	83	2200
SPE-168-66-HW-24	5901289755238	2700	83	2050

IP68 - 10m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SPE-168-68-CW-24	5901289754460	6000	84	2400
SPE-168-68-NW-24	5901289754477	4000	83	2300
SPE-168-68-WW-24	5901289754484	3000	83	2200



SHF-144




IP20 - 30m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SHF-144-CW-24	5901289755191	6000	84	1230
SHF-144-NW-24	5901289755207	4000	83	1180
SHF-144-WW-24	5901289755214	3000	83	1130
SHF-144-HW-24	5901289755221	2700	82	1070



SHF-234



IP20 - 30m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SHF-234-CW-24	5901289756846	6000	84	2450
SHF-234-NW-24	5901289756853	4000	83	2400
SHF-234-WW-24	5901289756860	3000	83	2320
SHF-234-HW-24	5901289756877	2700	82	2250



SCA


SERIES

120 lm/W
12V DC

Our most popular 12V strip for the 60led and 120led models. Also available in 240LED 24V version



SCA-60

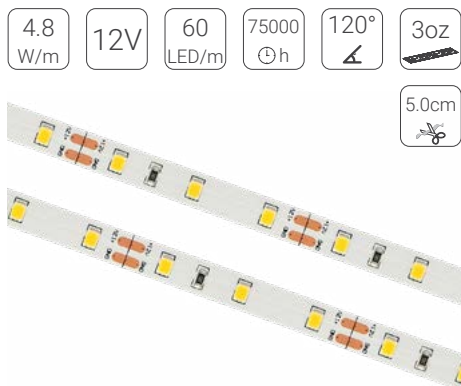

4.8 W/m	12V	60 LED/m	75000 h	120°	3oz	5.0cm
---------	-----	----------	---------	------	-----	-------

IP20 - 30m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SCA-60-CW	5901289753029	6000	83	580
SCA-60-NW	5901289753012	4000	83	550
SCA-60-WW	5901289753005	3000	83	520
SCA-60-HW	5901289752985	2700	83	480

IP66 - 10m/reel


Symbol	EAN13	Tc [K]	CRI	lm / m
SCA-60-66-CW	5901289754767	6000	83	580
SCA-60-66-NW	5901289754774	4000	83	550
SCA-60-66-WW	5901289754781	3000	83	520
SCA-60-66-HW	5901289752053	2700	83	480

IP68 - 10m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SCA-60-68-CW	5901289753050	6000	83	580
SCA-60-68-NW	5901289753043	4000	83	550
SCA-60-68-WW	5901289753036	3000	83	520
SCA-60-68-HW	5901289752978	2700	83	480



SCA-120

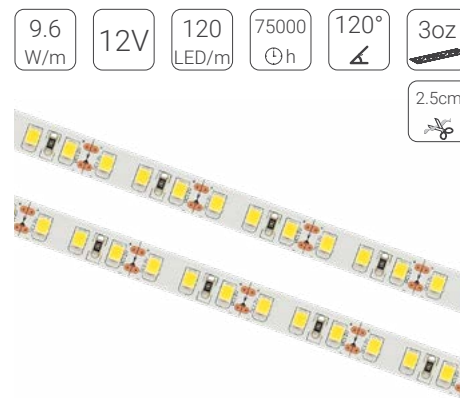

9.6 W/m	12V	120 LED/m	75000 h	120°	3oz	2.5cm
---------	-----	-----------	---------	------	-----	-------

IP20 - 30m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SCA-120-SW	5901289752039	12000	83	1100
SCA-120-DW	5901289755672	8500	83	1100
SCA-120-CW	5901289753128	6000	83	1160
SCA-120-NW	5901289753111	4000	83	1100
SCA-120-WW	5901289753104	3000	84	1040
SCA-120-HW	5901289752961	2700	83	960
SCA-120-822	5901289752046	2200	82	760

IP66 - 10m/reel


Symbol	EAN13	Tc [K]	CRI	lm / m
SCA-120-66-CW	5901289754798	6000	83	1160
SCA-120-66-NW	5901289754804	4000	83	1100
SCA-120-66-WW	5901289754811	3000	84	1040
SCA-120-66-HW	5901289752961	2700	83	960

IP68 - 10m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SCA-120-68-CW	5901289753159	6000	83	1160
SCA-120-68-NW	5901289753142	4000	83	1100
SCA-120-68-WW	5901289753135	3000	84	1040
SCA-120-68-HW	5901289752954	2700	83	960



SCA-240

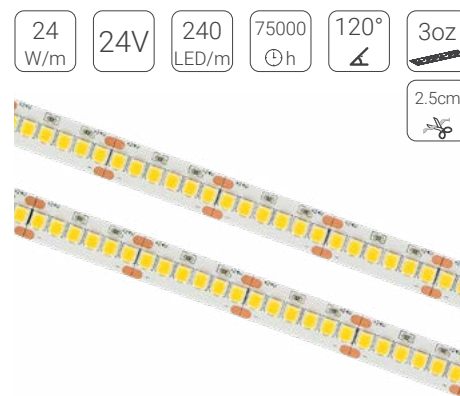

24 W/m	24V	240 LED/m	75000 h	120°	3oz	2.5cm
--------	-----	-----------	---------	------	-----	-------

IP20 - 30m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SCA-240-CW-24	5901289753920	6000	84	2700
SCA-240-NW-24	5901289753937	4000	84	2600
SCA-240-WW-24	5901289753944	3000	84	2500
SCA-240-HW-24	5901289753951	2700	83	2350



SCS

SERIES

4 - 5mm PCB

LED Strip 4mm wide for 120led 12V and 5mm wide for 17W 168led strip.



CCT


SERIES

2700 - 6500K

LED strips with the possibility of changing the color temperature. Available as COB, or SMD 2chip in one package



SCS-120




IP20 - 30m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SCS-120-CW	5901289753456	6000	82	1150
SCS-120-NW	5901289753463	4000	84	1120
SCS-120-WW	5901289753470	3000	83	1080



COB-640 8+8W/m




IP20/IP66 - 10m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
COB-640-90CCT-24	5901289755856	2700	94	527
COB-640-66-90CCT-24	5901289755962	6000	94	723



SCS-168




IP20 - 30m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SCS-168-CW-24	5901289754279	6000	84	2400
SCS-168-NW-24	5901289754286	4000	83	2300
SCS-168-WW-24	5901289754293	3000	83	2200



SPA-120 9.6+9.6W/m




IP20 - 30m/reel IP66 - 10m/reel

Symbol	EAN13	Tc [K]	CRI	lm / m
SPA-120-CCT-24	5901289753357	2700	87	930
SPA-120-68-CCT-24	5901289753364	6000	87	1000



SPA-60 4.8+4.8W/m




IP20 - 30m/reel

Symbol	EAN13	T _c [K]	CRI	lm / m
SPA-60-CCT	5901289752992	2700 - 6000	87	460 + 490



COB-840 RGB




IP20 - 10m/reel IP66 - 10m/reel

Symbol	EAN13	IP	lm / m
COB-840-RGB-24	5901289755955	20	120 R 400 G 110 B
COB-840-66-RGB-24	5901289755979	66	




COB-896 RGBW



IP20 - 10m/reel IP66 - 10m/reel

Symbol	EAN13	T _c [K]	lm / m
COB-896-RGBCW-24	5901289756440	RGB+6000	110 R 230 G 60 B 290 W
COB-896-RGBNW-24	5901289756457	RGB+4000	
COB-896-RGBWW-24	5901289756464	RGB+3000	

COB-840 RGCCT



IP20 - 10m/reel IP66 - 10m/reel

Symbol	EAN13	T _c [K]	lm / m
COB-840-RGCCT-24	5901289755344	RGB + 6000 + 2700	90 R 200 G 50 B 225 CW 240 WW
COB-840-66-RGCCT-24	5901289755351		



RGB

SERIES

RGB, RGBW, RGCCT

Multicolor LED Strip, available in the following versions: RGB (3 chip), RGBW (4 chip) multicolor with white color, RGCCT (5chip) multicolor with the ability to change the color temperature

SPB-30-RGB 12V/24V

7.2 W/m	24V	12V	30 LED/m	120°	3oz
------------	-----	-----	-------------	------	-----



IP20 - 30m/reel IP66/IP68 - 10m/reel

Symbol	EAN13	IP	U [V]	lm /m
SPB-30-RGB-24	5901289753166	IP20	24	65 R 160 G 50 B
SPB-30-66-RGB-24	5901289755160	IP66	24	
SPB-30-68-RGB-24	5901289753173	IP68	24	
SPB-30-RGB	5901289753807	IP20	12	
SPB-30-66-RGB	5901289755184	IP66	12	
SPB-30-68-RGB	5901289753814	IP68	12	



SPB-60-RGB 12V/24V

14.4 W/m	24V	12V	60 LED/m	120°	3oz
-------------	-----	-----	-------------	------	-----



IP20 - 30m/reel IP66/IP68 - 10m/reel

Symbol	EAN13	IP	U [V]	lm /m
SPB-60-RGB-24	5901289753180	IP20	24	130 R 320 G 100 B
SPB-60-66-RGB-24	5901289754866	IP66	24	
SPB-60-68-RGB-24	5901289753197	IP68	24	
SPB-60-RGB	5901289753821	IP20	12	
SPB-60-68-RGB	5901289753838	IP68	12	



SPF-120-RGB

22 W/m	24V	120 LED/m	120°	3oz
-----------	-----	--------------	------	-----



IP20 - 30m/reel IP66/IP68 - 10m/reel

Symbol	EAN13	U [V]	lm /m
SPF-120-RGB-24	5901289754040	24	210 R 610 G 130 B
SPF-120-66-RGB-24	5901289754057	24	



SPB-60-RGBCCT 5Chip SMD

20 W/m	24V	5Chip LED	60 LED/m	120°	3oz
-----------	-----	--------------	-------------	------	-----



IP20 - 30m/reel IP66/IP68 - 10m/reel

Symbol	EAN13	IP	lm /m
SPB-60-RGBCCT-24	5901289754309	IP20	135 R 330 G 70 B 470 CW 380 WW
SPB-60-66-RGBCCT-24	5901289752701	IP20	



SPB-30-RGBW 4Chip SMD

9.6 W/m	15 W/m	12V	24V	30 LED/m	120°	3oz
------------	-----------	-----	-----	-------------	------	-----



IP20 - 30m/reel IP66 - 10m/reel

Symbol	EAN13	U [V]	P [W]	lm /m
SPB-30-RGBWW	5901289753968	12	9.6	65 R 150 G 45 B 200 W
SPB-30-RGBWW-24	5901289753975	24	9.6	
SPB-30H-RGBCW-24	5901289754187	24	15	65 R 150 G 45 B 700 W
SPB-30H-RGBNW-24	5901289754194	24	15	
SPB-30H-RGBWW-24	5901289754200	24	15	




SPB-60-RGBW 4Chip SMD

19.2 W/m	24V	60 LED/m	120°	3oz
-------------	-----	-------------	------	-----



IP20 - 30m/reel IP66/IP68 - 10m/reel

Symbol	EAN13	IP	U [V]	lm /m
SPB-60-RGBCW-24	5901289754620	IP20	24	120 R 320 G 85 B 440 W
SPB-60-RGBNW-24	5901289754491	IP20	24	
SPB-60-66-RGBNW-24	5901289752084	IP66	24	
SPB-60-RGBWW-24	5901289753869	IP20	12	
SPB-60-66-RGBWW-24	5901289752077	IP66	12	



NEON LED

High-quality silicone LED neon-lights. They do not turn yellow, are resistant to high temperature and chemicals, can be used in harsh outdoor conditions.
Uniform luminance, all over the surface.
Available with clamping and cutting accessories.

NEON 16mm x 16mm - possibility of bending in two directions



24V	50000 h	120°	IP65	CRI >80
-----	------------	------	------	------------

Symbol	EAN13	T [C]	P [W]	lm / m
NLP-1616-5-CW-24	5901289756693	6000	5.5	590
NLP-1616-5-NW-24	5901289756686	4000	5.5	570
NLP-1616-5-WW-24	5901289756679	3000	5.5	550
NLP-1616-15-RGB-24	5901289756709	RGB	15	310

NEON COB 10mm x 4mm




24V	50000 h	120°	IP65	CRI >80
-----	------------	------	------	------------

Symbol	EAN13	T [C]	P [W]	lm / m
NLP-1616-5-CW-24	5901289756693	6000	5.5	590
NLP-1616-5-NW-24	5901289756686	4000	5.5	570
NLP-1616-5-WW-24	5901289756679	3000	5.5	550
NLP-1616-15-RGB-24	5901289756709	RGB	15	310

NEON 6mm x 12mm



24V	50000 h	120°	IP65	CRI >80
-----	------------	------	------	------------




Symbol	EAN13	T [C]	P [W]	lm / m
NLP-0612-5-CW-24	5901289756822	6000	5.5	480
NLP-0612-5-NW-24	5901289756815	4000	5.5	460
NLP-0612-5-WW-24	5901289756808	3000	5.5	430
NLP-0612-15-RGB-24	5901289756839	RGB	15	250

NEON 10mm x 23mm



24V	50000 h	160°	IP65	CRI >80
-----	------------	------	------	------------




Symbol	EAN13	T [C]	P [W]	lm / m
NL1023-14-CW-24	5901289755634	6000	14	720
NL1023-14-NW-24	5901289755634	4000	14	680
NL1023-14-WW-24	5901289755634	3000	14	650
NL1023-14-RGB-24	5901289755634	RGB	14	220

NEON 4mm x 10mm



24V	50000 h	160°	IP65	CRI >80
-----	------------	------	------	------------



Symbol	EAN13	T [C]	P [W]	lm / m
NL0410-12-CW-24	5901289755771	6000	12	560
NL0410-12-NW-24	5901289755788	4000	12	550
NL0410-12-WW-24	5901289755795	3000	12	530

Power supplies

Constant voltage

12 V DC
24 V DC

Available for indoor and outdoor use, warranty
2 - 5 years depending on the model.



MPV - Furniture power supplies

- IP20 Designed for indoor use
- Protections: Short circuit, Overload, Over temperature
- Cooling by free air convection
- 100% full load burn-in test
- Warranty 5 years

Photo	Symbol	EAN13	dimensions [length/width/ height]	power [W]	current [A]	efficiency [%]
	MPV-15-12	5901289758260	103mm - 35.5mm - 16mm	15	1.25	82
	MPV-15-24	5901289758277		15	0.625	82
	MPV-20-12	5901289758284	103mm - 35.5mm - 16mm	20	1.67	85
	MPV-20-24	5901289758284		20	0.83	85
	MPV-30-12	5901289758307	154mm - 50mm - 14mm	30	2.50	86
	MPV-30-24	5901289758314		30	1.25	86

MPF - ultra-flat IP67 hermetic power supplies

- IP67 designed for indoor and outdoor use
- Protections: Short circuit, Overload, Over temperature
- Cooling by free air convection
- Build in active PFC function, PF > 0.96
- Warranty 5 years

Photo	Symbol	EAN13	dimensions [length/width/ height]	power [W]	current [A]	efficiency [%]
	MPF-60-12	5901289758109	202mm - 48mm - 19mm	60	5.0	93
	MPF-60-24	5901289758116		60	2.5	94
	MPF-100-12	5901289758123	202mm - 48mm - 19mm	100	8.3	93
	MPF-100-24	5901289758130		100	4.2	94
	MPF-150-12	5901289758147	202mm - 60mm - 19mm	150	12.5	93
	MPF-150-24	5901289758154		150	6.3	94
	MPF-200-12	5901289758161	242mm - 67mm - 23mm	200	16.7	93
	MPF-200-24	5901289758178		200	8.3	94
	MPF-250-12	5901289758185	242mm - 67mm - 23mm	250	21.0	93
	MPF-250-24	5901289758192		250	10.5	94
	MPF-300-12	5901289758208	282mm - 86mm - 23.5mm	300	25.0	93
	MPF-300-24	5901289758215		300	12.5	94
	MPF-350-12	5901289758222	282mm - 86mm - 23.5mm	350	29.0	93
	MPF-350-24	5901289758239		350	14.5	94
	MPF-500-12	5901289758246	272mm - 92mm - 38mm	500	41.7	93
	MPF-500-24	5901289758253		500	21.0	94


MLA - linear power supplies



- Ultra-thin linear size, width only 30mm, suitable for ultra-small space installation
- Protections: short circuit, over current, over voltage, over temperature
- Cooling by free air convection
- Build in active PFC function, PF > 0.95
- Warranty 5 years

Photo	Symbol	EAN13	dimensions [length/width/ height]	power [W]	current [A]	efficiency [%]
	MLA-60-12	5901289758406	300mm - 30mm - 18mm	60	5.0	93
	MLA-60-24	5901289758413		60	2.5	93
	MLA-100-12	5901289758420	314mm - 30mm - 18mm	100	8.3	93
	MLA-100-24	5901289758437		100	4.2	93
	MLA-150-12	5901289758444	356mm - 32mm - 22.5mm	150	12.5	93
	MLA-150-24	5901289758451		150	6.2	93

MPCF - modular power supplies PFC

- Protections: short circuit, over current, over voltage, over temperature
- Cooling by free air convection
- Build in active PFC function, PF > 0.95
- Warranty 5 years

Photo	Symbol	EAN13	dimensions [length/width/ height]	power [W]	current [A]	efficiency [%]
	MPCF-100-12	5901289758604	175mm - 43mm - 20.5mm	100	8.3	93
	MPCF-100-24	5901289758611		100	4.2	93
	MPCF-250-12	5901289758345	194mm - 55mm - 26mm	250	20.8	93
	MPCF-250-24	5901289758352		250	10.4	93

	MPCF-350-12	5901289758369	220mm - 62mm - 31mm	350	29.0	93
	MPCF-350-24	5901289758376		350	14.5	93
	MPCF-500-12	5901289758383	232mm - 81mm - 31mm	500	41.7	93
	MPCF-500-24	5901289758390		500	20.8	93


MPC-D - dimmable power supplies

- Designed for indoor use
- Controlled by a 0/1-10V signal, or TRIACK dimmer
- Protections: Short circuit, Overload, Over temperature
- Cooling by free air convection
- 100% full load burn-in test
- Warranty 24 months

Photo	Symbol	EAN13	dimensions [length/width/ height]	power [W]	current [A]	efficiency [%]
	MPC-60-12-D	5901289750110	145mm - 49mm - 29mm	60	5.0	84
	MPC-60-24-D	5901289750127		60	2.5	86
	MPC-100-12-D	5901289750134	145mm - 49mm - 29mm	100	8.3	85
	MPC-100-24-D	5901289750141		100	4.2	85
	MPC-150-12-D	5901289750158	180mm - 63mm - 29mm	150	12.5	84
	MPC-150-24-D	5901289750165		150	6.25	86
	MPC-200-12-D	5901289750172	205mm - 63mm - 29mm	200	16.7	84
	MPC-200-24-D	5901289750189		200	8.3	86

MPC - modular power supplies

- Designed for indoor use
- Protections: Short circuit, Overload, Over temperature
- Cooling by free air convection
- 100% full load burn-in test
- Warranty 24 months

Photo	Symbol	EAN13	dimensions [length/width/ height]	power [W]	current [A]	efficiency [%]
	MPC-30-12	5901289750196	135mm - 35mm - 23mm	30	2.5	86
	MPC-30-24	5901289750202		30	1.25	86
	MPC-60-12	5901289750219	170mm - 34mm - 23mm	60	5.0	88
	MPC-60-24	5901289750226		60	2.5	88
	MPC-100-12	5901289750233	140mm - 49mm - 29mm	100	8.3	88
	MPC-100-24	5901289750240		100	4.2	88
	MPC-150-12	5901289750257	195mm - 49mm - 29mm	150	12.5	88
	MPC-150-24	5901289750264		150	6.25	88
	MPC-200-12	5901289750271	195mm - 49mm - 29mm	200	16.7	88
	MPC-200-24	5901289750288		200	8.3	88
	MPC-250-12	5901289750295	258mm - 48mm - 29mm	250	21	89
	MPC-250-24	5901289750301		250	10.4	89

MPCS - configurable modular power supplies

- Designed for indoor use
- Soft start mode, with four gears dimming mode 100%, 75%, 50%, 25%
- Protections: Short circuit, Overload, Over temperature
- Cooling by free air convection
- 100% full load burn-in test
- Warranty 24 months







Photo	Symbol	EAN13	dimensions [length/width/ height]	power [W]	current [A]	efficiency [%]
	MPCS-60-12	5901289758505	170mm - 35mm - 23mm	60	5.0	82
	MPCS-60-24	5901289758512		60	2.5	82
	MPCS-100-12	5901289758482	145mm - 48mm - 24mm	100	8.5	85
	MPCS-100-24	5901289758499		100	4.2	85
	MPCS-150-12	5901289758529	195mm - 48mm - 24mm	150	12.5	86
	MPCS-150-24	5901289758536		150	6.3	86
	MPCS-200-12	5901289758543	215mm - 48mm - 24mm	200	16.7	87
	MPCS-200-24	5901289758550		200	8.50	87
	MPCS-300-12	5901289758567	236mm - 49mm - 29mm	300	25	82
	MPCS-300-24	5901289758574		300	12.5	82
	MPCS-400-12	5901289758581	236mm - 49mm - 29mm	400	33.4	85
	MPCS-400-24	5901289758598		400	16.7	85

MiBoxer / MiLight

We are a direct distributor of MiBoxer products.
We have most of the assortment in stock in Wrocław, which
guarantees a quick delivery time.


MiBOXER® | **Mi·Light**
Subordinate New Brand

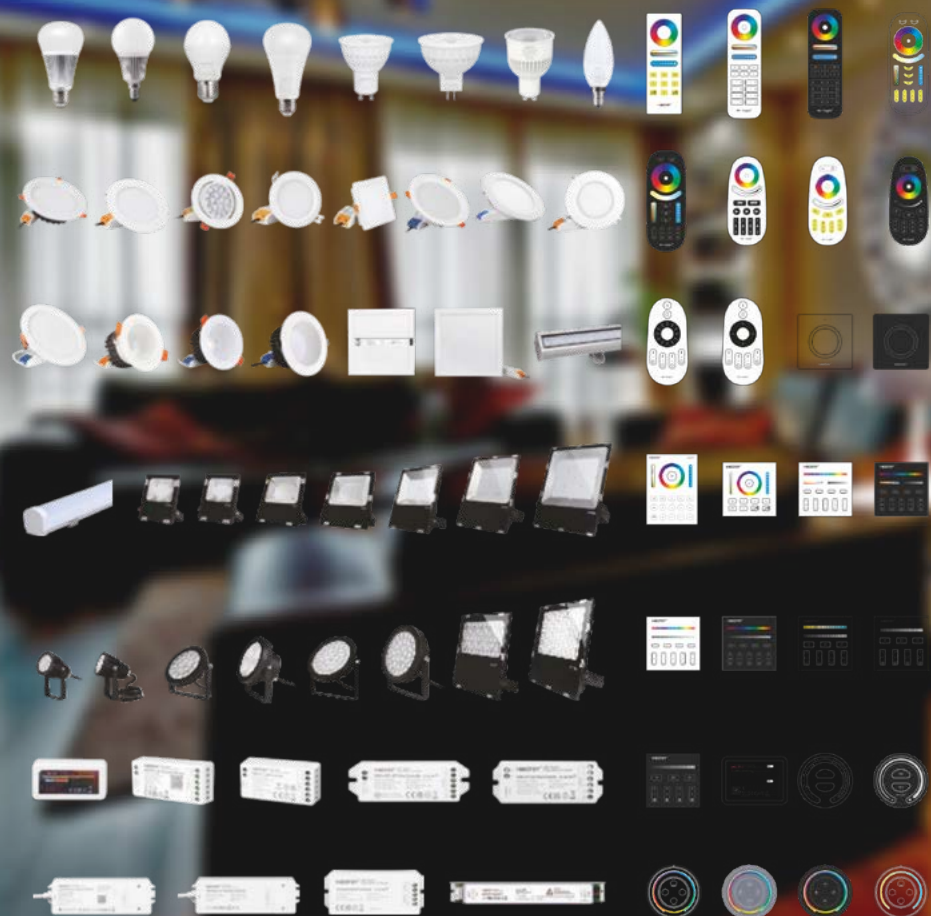

Also in our offer



Profiles LED



Accessories for LED strips



Register in our B2B system



info@fose.eu • www.fose.eu
Miernicza 16/1A, 50-435 Wrocław
+48 733 478 002 • +48 883 176 064 • +48 508 357 336